

PRODUCT INFORMATION PACKET



Model No: 048S17D2054

Catalog No: B302

Fan and Blower Motor, 0.25 HP, 1 Ph, 60 Hz, 115 V, 1800 RPM, 48Z Frame, DP



Regal and LEESON are trademarks of Regal Rexnord Corporation or one of its affiliated companies.

©2025 Regal Rexnord Corporation, All Rights Reserved. MC017097E





Nameplate Specifications


Phase	1	Output HP	0.25 Hp
Output KW	0.19 kW	Voltage	115 V
Speed	1725 rpm	Service Factor	1.35
Frame	48Z	Enclosure	Drip Proof
Thermal Protection	No Protection	Efficiency	57.5 %
Ambient Temperature	40 °C	Frequency	60 Hz
Current	5.0 A	Power Factor	59
Duty	Continuous	Insulation Class	B
Design Code	NO DESIGN CODE	KVA Code	P
Drive End Bearing Size	6203	Opp Drive End Bearing Size	6203
UL	Recognized	CSA	Y
CE	N	IP Code	22
Number of Speeds	1		

Technical Specifications

Electrical Type	Split Phase	Starting Method	Across The Line
Poles	4	Rotation	Selective Counterclockwise
Resistance Main	2.3 Ohms	Mounting	Resilient Base - Extended Studs
Motor Orientation	Horizontal	Drive End Bearing	Ball
Opp Drive End Bearing	Ball	Frame Material	Rolled Steel
Shaft Type	Single Special Extension	Overall Length	9.57 in
Shaft Diameter	0.500 in	Shaft Extension	2.01 in
Assembly/Box Mounting	F1 ONLY		
Connection Drawing	52A105377AA	Outline Drawing	52A111268P1

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:07/29/2025

THIRD ANGLE PROJECTION



REVISIONS

REV.	DESCRIPTION	DATE	APPROVED
4	UPDATED FORMAT	10/05/05	MAM


SHEET

REV

52A111268

SIZE DRAWING NO.

A

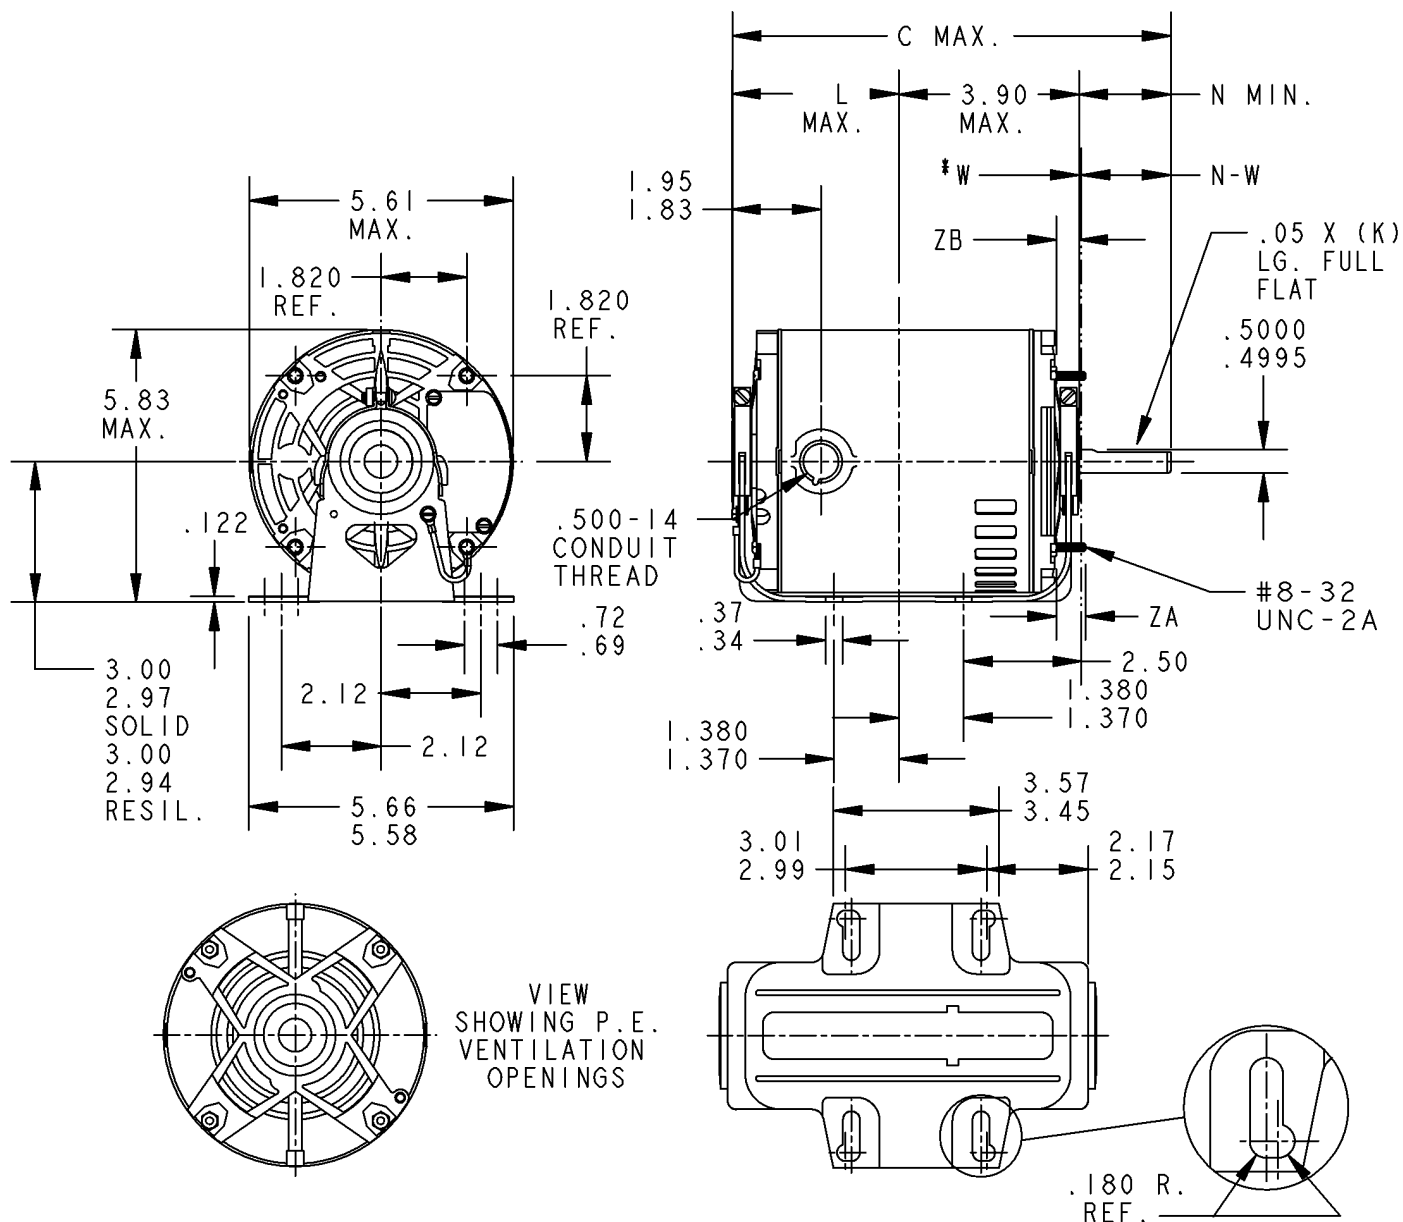

W* IS A CLEARANCE DUE TO VARIATION IN PARTS AND ASSEMBLY

I	KH	33	48Y	9.57	1.62	3.84	1.88	2.01/1.79	.55/.52	.76
P	TYPE	GE SIZE	NEMA FR	C	K	L	N	N-W	ZB	ZA

SIGNATURES

DATE

MODEL

DURGA

12/15/04

DETAIL

CHECKED

ENGRG

MFG

QUALITY

ISSUED

DURGA

12/15/04

FOR ADDITIONAL INFO REFER TO:

APPLIED

PRACTICES

DIMENSIONS ARE IN INCHES

MATERIAL

SOLID MODEL: 52A111268



REGAL-BELOIT CORPORATION

TITLE

OUTLINE

FORM N - GENERAL PURPOSE MOTOR - DRIP PROOF
RESIL. BASE - BALL BEARING

SIZE

A

DRAWING

SCALE: 1.000


REF. No:

52A111268

REV

4

SHEET 1 of 1

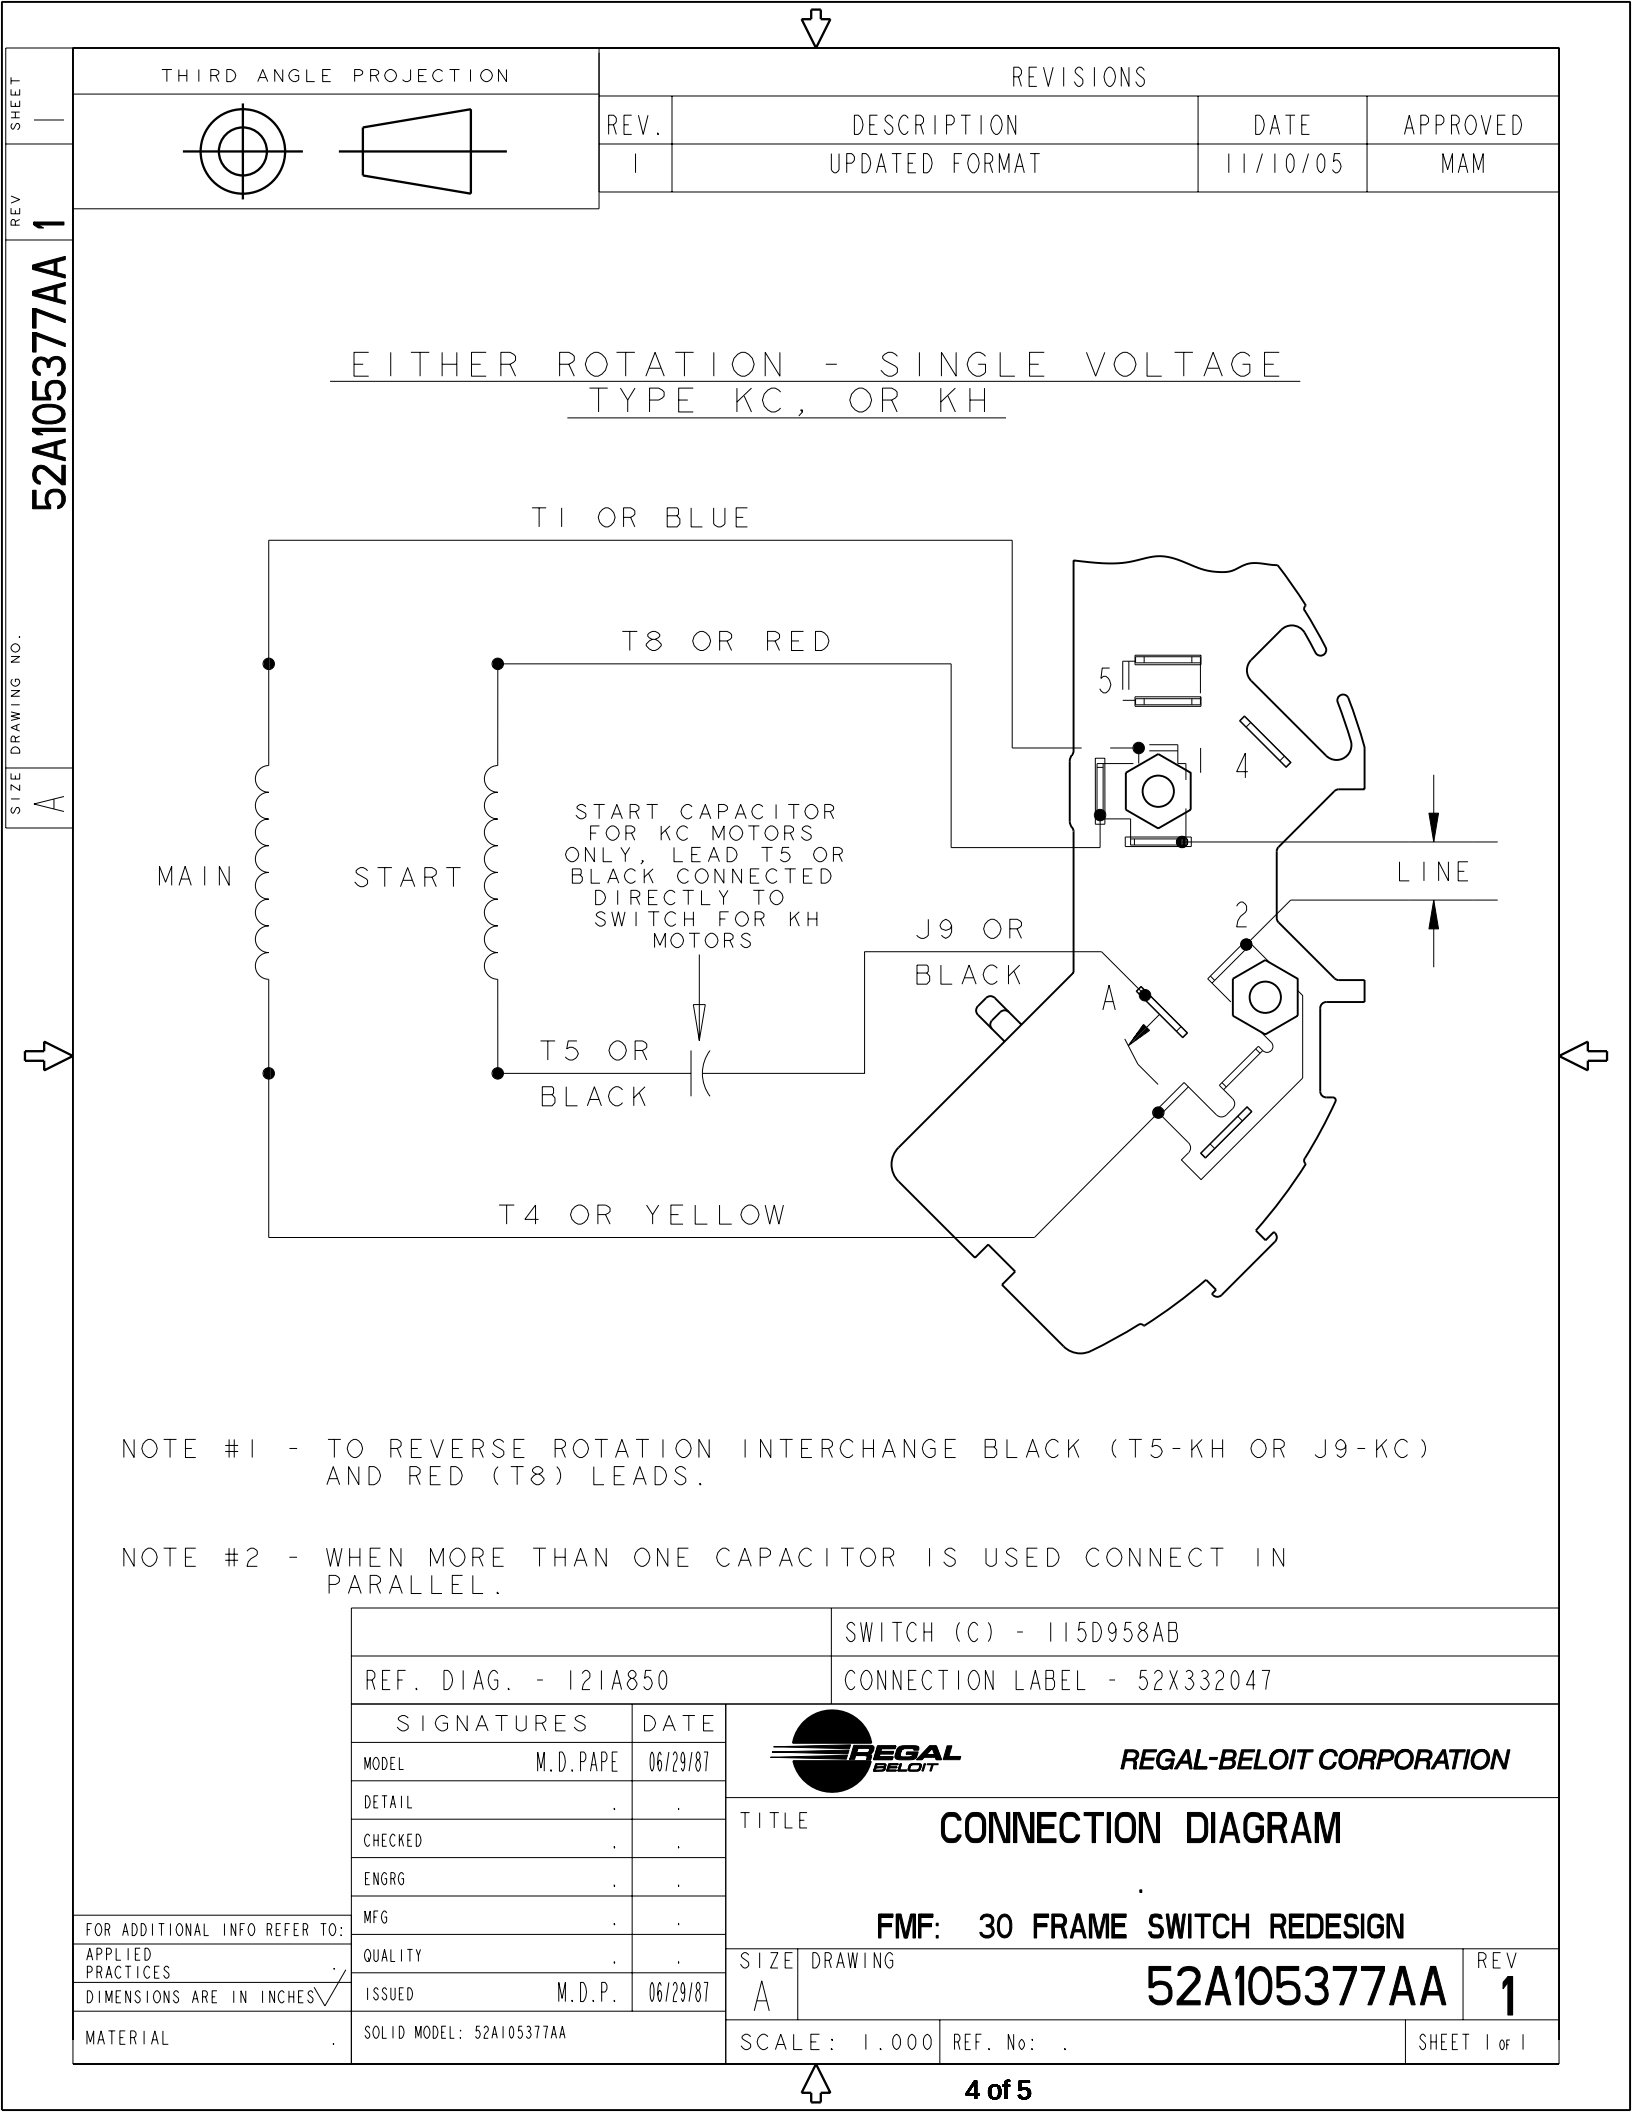

**CERTIFICATION DATA SHEET****CUSTOMER:****ORDER #:****CONN. DIAGRAM:** 52A105377AA**OUTLINE:** 52A111268P1**WINDING #:** 52X332048P1 0**CUSTOMER PO#:****MODEL #:** 48S17D2054 M**CUSTOMER PART #:****MOUNTING:** F1 ONLY**TYPICAL MOTOR PERFORMANCE DATA**

HP	kW	SYNC. RPM	F.L. RPM	FRAME	ENCLOSURE	KVA CODE	DESIGN
1/4	0.19	1800	1725	48Z	DP	P	NO DESIGN CODE

PH	Hz	VOLTS	AMPS	START TYPE	DUTY	INSL	S.F.	AMB°C
1	60	115	5.0	ACROSS THE LINE	CONTINUOUS	B	1.35	40

FULL LOAD EFF:	57.5	3/4 LOAD EFF:	54	1/2 LOAD EFF:	46.1	GTD. EFF		ELEC. TYPE
FULL LOAD PF:	59	3/4 LOAD PF:	51.4	1/2 LOAD PF:	42.7	55		SPLIT PHASE

F.L. TORQUE	LOCKED ROTOR AMPS	L.R. TORQUE	B.D. TORQUE	F.L. RISE°C
12.1 OZ-FT	27.7	21.6 OZ-FT 0 %	31.53 OZ-FT 0 %	-

SOUND PRESSURE @ 3 FT.	SOUND POWER	ROTOR WK^2	MAX. WK^2	SAFE STALL TIME	STARTS / HOUR	APPROX. MOTOR WGT
- dBA	- dBA	- LB-FT^2	- LB-FT^2	- SEC.	-	14 LBS.

***** SUPPLEMENTAL INFORMATION *****

DE BRACKET TYPE	ODE BRACKET TYPE	MOUNT TYPE	ORIENTATION	SEVERE DUTY	HAZARDOUS LOCATION	DRIP COVER	SCREENS	PAINT
STANDARD	STANDARD	RESILIENT BASE-EXTENDED STUDS	HORIZONTAL	FALSE	NONE	FALSE	NONE	GRAY (POWDER)

BEARINGS		GREASE	SHAFT TYPE	SPECIAL DE	SPECIAL ODE	SHAFT MATERIAL	FRAME MATERIAL
DE	ODE						
BALL	BALL	POLYREX EM	SGL SPL EXT	0.500 x 1.88 IN SEF WITH 1.62 IN FULL FLAT	NONE	1144 STRESSPROOF (C-223)	ROLLED STEEL
6203	6203						

THERMO-PROTECTORS				THERMISTORS	CONTROL	SPACE HEATERS
THERMOSTATS	PROTECTORS	WDG RTDs	BRG RTDs			
NONE	NOT	NONE	NONE	NONE	FALSE	NONE VOLTS

*

N

O

T

E

S

*

INVERTER TORQUE: NONE
INV. HP SPEED RANGE: NONE**ENCODER:** NONE
NONE NONE
NONE NONE PPR**BRAKE:** NONE NONE
NONE P/N NONE
NONE NONE
NONE FT-LB NONE V NONE Hz**PREPARED BY:** Venkata Datta Ganesh Kothapalli **DATE:**

04/10/2025 04:28:58 AM

FORM 3531 REV.3 02/07/99

** Subject to change without notice.

REV 1 - CHANGED LOGO FROM MARATHON TO LEESON - 3/25/2025